
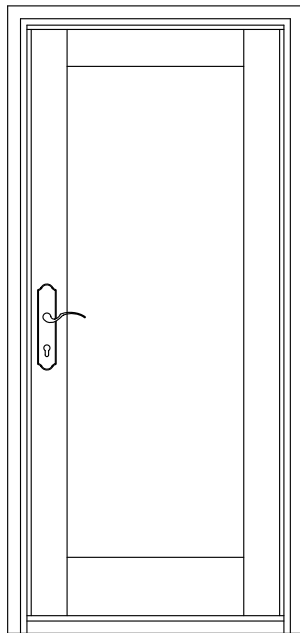


**UNIT SIZING, ROUGH OPENINGS  
& MASONRY OPENINGS  
-FOR INSWING UNITS-**

**STANDARD OFFERING**

#20 EXTERIOR BRICKMOULD  
& #13 INTERIOR CASING



**GENERAL NOTES**

UNITS WITH NO EXTERIOR TRIM  
FRAME SIZE = UNIT SIZE


UNIT SIZE IS ALWAYS THE  
EXTREME SIZE OF THE DOOR  
WITH OR WITHOUT TRIM

ROUGH OPENING IS ALWAYS 1"  
OVER FRAME SIZE OF THE DOOR

MASONRY OPENING WIDTH IS  
ALWAYS 1/4" OVER THE UNIT WIDTH

MASONRY OPENING HEIGHT IS  
ALWAYS 1/8" OVER THE UNIT HEIGHT

VALUES IN BRACKETS [ ] ARE  
MILLIMETER CONVERSIONS

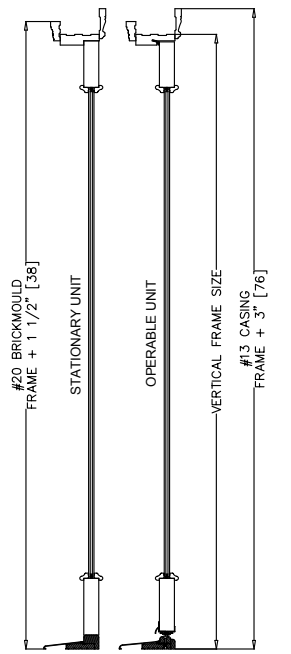

**UNIT SIZING**


FRAME TO OUTSIDE OF TRIM (UNIT) SIZE

**ADDITIONAL VERTICAL BRICKMOULD**


#20 W/ STUCCO KEY, #21, & #22  
\*\*EXTERIOR APPLICATION

**ADDITIONAL VERTICAL CASING**

#14, #15, #16, #17, #21, #23, #24, & #25  
\*\*INTERIOR APPLICATION

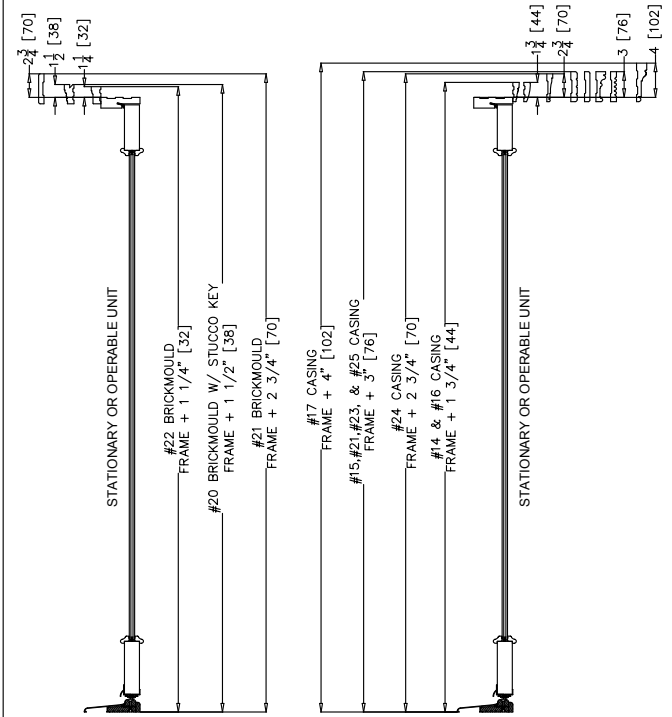


**ROUGH OPENING**

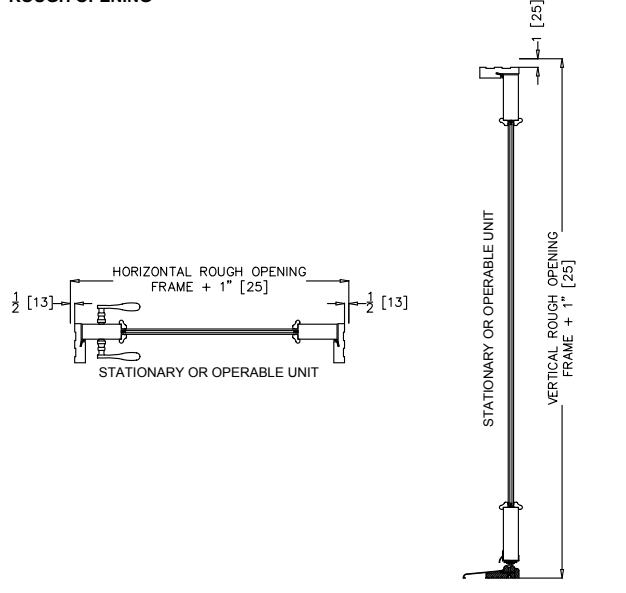

**ADDITIONAL HORIZONTAL BRICKMOULD**

#20 W/ STUCCO KEY, #21, & #22


\*\*EXTERIOR APPLICATION

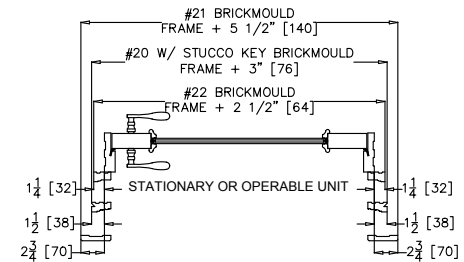

**ADDITIONAL HORIZONTAL CASING**

#14, #15, #16, #17, #21, #23, #24, & #25

\*\*INTERIOR APPLICATION

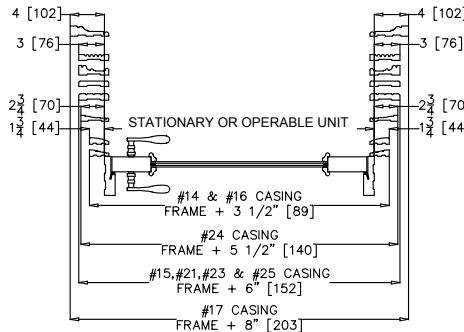




## UNIT SIZING, ROUGH OPENINGS & MASONRY OPENINGS -FOR OUTSWING UNITS-

### STANDARD OFFERING

#20 EXTERIOR BRICKMOULD  
& #13 INTERIOR CASING



### GENERAL NOTES

UNITS WITH NO EXTERIOR TRIM  
FRAME SIZE = UNIT SIZE



UNIT SIZE IS ALWAYS THE  
EXTREME SIZE OF THE DOOR  
WITH OR WITHOUT TRIM

ROUGH OPENING IS ALWAYS 1"  
OVER FRAME SIZE OF THE DOOR

MASONRY OPENING WIDTH IS  
ALWAYS 1/4" OVER THE UNIT WIDTH

MASONRY OPENING HEIGHT IS  
ALWAYS 1/8" OVER THE UNIT HEIGHT

VALUES IN BRACKETS [ ] ARE  
MILLIMETER CONVERSIONS

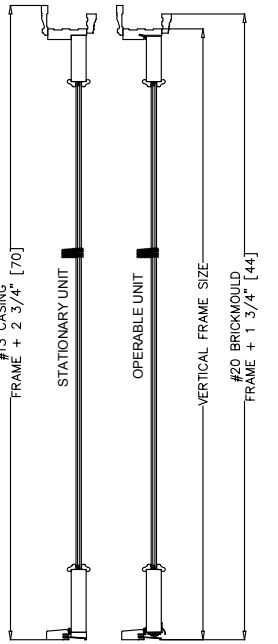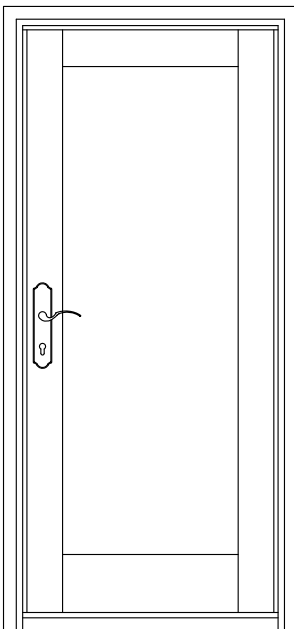


### UNIT SIZING


FRAME TO OUTSIDE OF TRIM (UNIT) SIZE

**ADDITIONAL VERTICAL BRICKMOULD**  
#20 W/ STUCCO KEY #21, & #22  
\*\*EXTERIOR APPLICATION


**ADDITIONAL VERTICAL CASING**  
#14, #15, #16, #17, #21, #23, #24, & #25  
\*\*INTERIOR APPLICATION

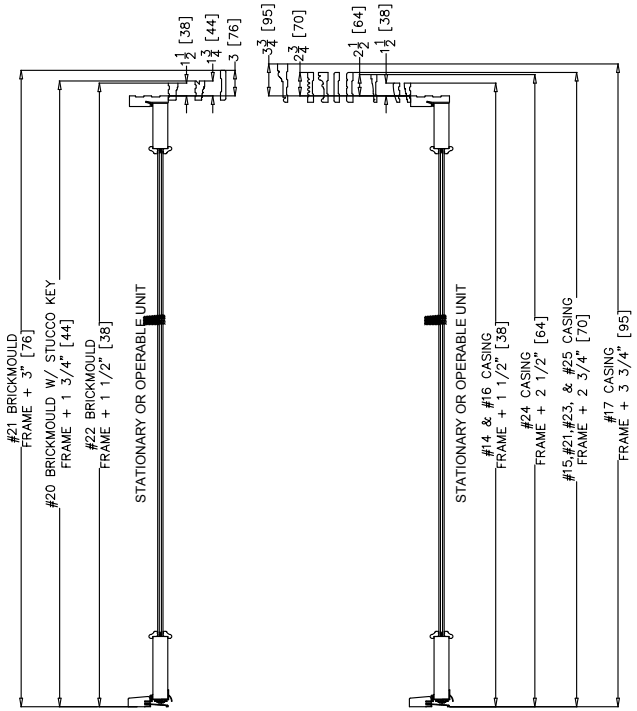

### ROUGH OPENING

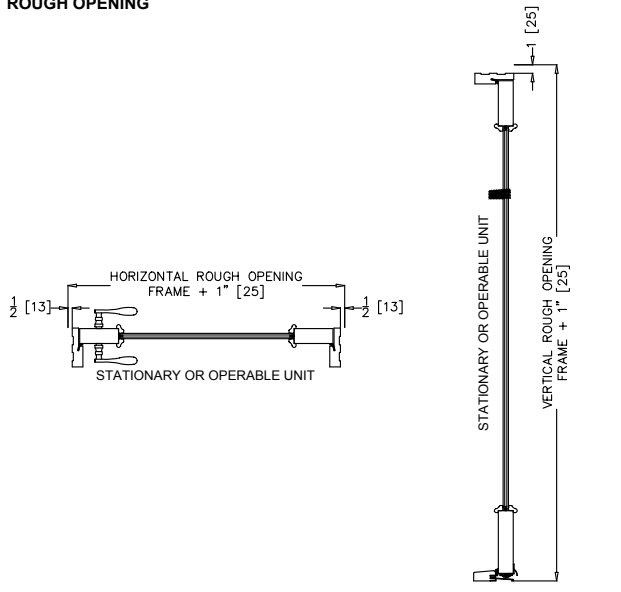

**ADDITIONAL HORIZONTAL BRICKMOULD**  
#20 W/ STUCCO KEY #21, & #22  
\*\*EXTERIOR APPLICATION

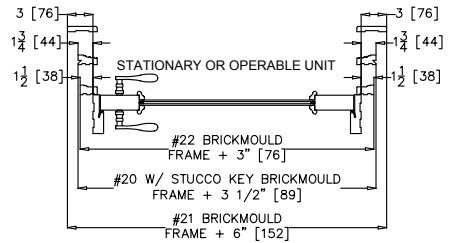

**ADDITIONAL HORIZONTAL CASING**  
#14, #15, #16, #17, #21, #23, #24, & #25  
\*\*INTERIOR APPLICATION

